

Emission Defence Packing

EDP15 for Valves

- **API 622 2nd Edition Certified and compliant with Enhanced LDAR performance requirements for valves**
- **Excellent sealability in a single spool packing**
- **Excellent flexibility allowing for easy installation and handling in the field**
- **Extremely formable with low extrusion under gland load**
- **Extremely low friction**

Pillar style EDP 15/No. 6315CL-EDP15 is made from high grade flexible graphite Pillarfoil® yarn that is externally reinforced by inconel wire mesh. The packing is treated with a special lubricant to ensure excellent sealability.

PILLAR
Engineered Sealing Solutions

GPLC 1220A-1

Emission Defence Packing

EDP15 for Valves



SIZE
5/16"(7.9mm)

Dimensions

SIZE		LOT	Spool Size (mm)	Reference		
		Meter/spool (O-10%)		ft/spool (O-10%)	NET WEIGHT*	
Inches	mm				lbs	kg
1/8"	3.2	30	φ 130	98.4	1.10	0.5
3/16"	4.8	20		65.6	1.60	0.7
		30	φ 200	98.4	2.40	1.1
1/4"	6.4	10	φ 130	32.8	1.40	0.6
		20	φ 200	65.6	2.80	1.3
5/16"	7.9	10	φ 130	32.8	2.10	1.0
		20	φ 200	65.6	4.20	1.9
		30		98.4	6.40	2.9
3/8"	9.5	10	φ 200	32.8	3.10	1.4
		20		65.6	6.20	2.8
7/16"	11.1	10	φ 250	32.8	4.20	1.9
		20		65.6	8.40	3.8
1/2"	12.7	10	φ 200	32.8	5.50	2.5
		20	φ 250	65.6	11.00	5.0

* Product weight (Not include spool & Box)

Applications

- 1) Refinery, Petro-chemical
- 2) Chemical
- 3) Cryogenic
- 4) Power plant, e.t.c.

Follow the instructions, before installation and operation, for your safety.

* Specifications and dimensions are subject to change without prior notice.

* The data on this catalogue are solely for your reference and are not to be construed as constituting a warranty.

* EDP® and PILLARFOIL® are registered trademark of Nippon Pillar Packing Co., Ltd.

NIPPON PILLAR PACKING CO., LTD.

11-48,2-Chome, Nonaka Minami,
Yodogawa-ku, Osaka, 532-0022 Japan
TEL +81 6 6305 2821
FAX +81 6 6302 3300
(URL) <http://www.pillar.co.jp>

Specifications

Temperature

-328 ~ +750°F (-200 ~ +400°C) *

Pressure


2200psi (155 bar)

ASME class 900

pH

0 to 14 (except strong oxidizers)

* On the condition the temperature of the packing remains below +660°F (+350°C)

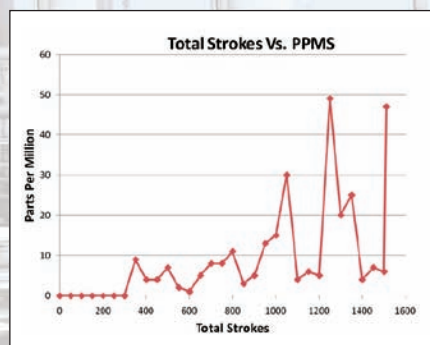

API622 2nd Edition Testing by United Valve
Test Packing : EDP15 / 6-ring (6.5mm)

DISTRIBUTED BY